


## V200 Feedback options



All Parts for the V200 M-mA Feedback




Remove the cover, Indicator Arrow, and Allen Head Screw

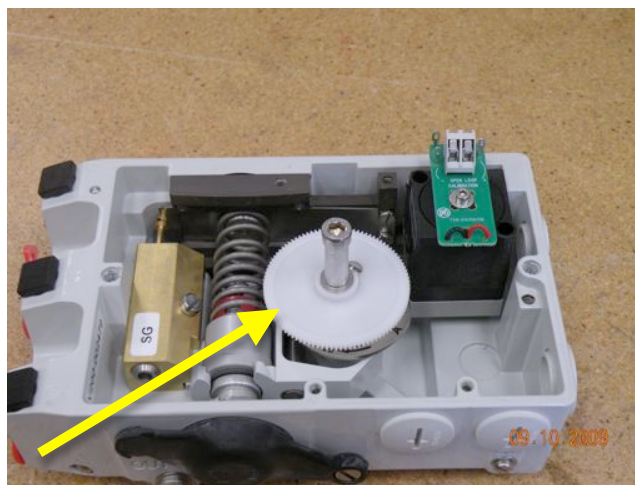


Place the large gear wheel on top of the cam nut with the hub facing up. Tighten the indicator screw using the flat washer to secure gear wheel.

## V200 Feedback options

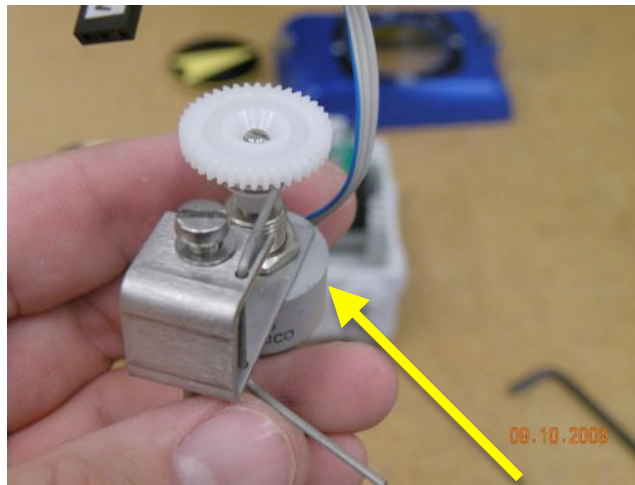

Rotate spring wire under the gear wheel.

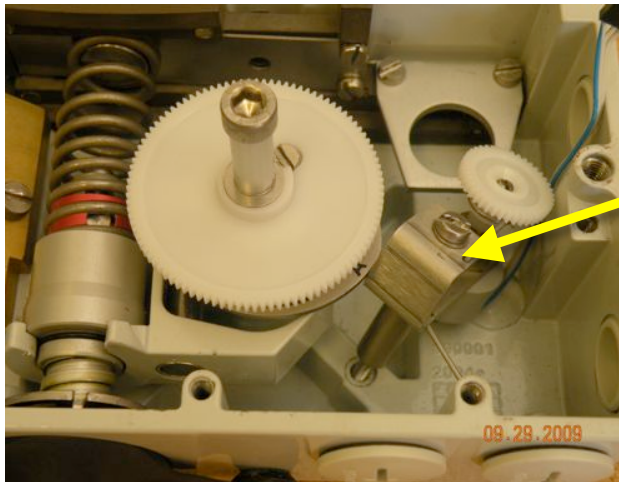


Tighten the pot assemble into the positioner body and align the gear wheels. Make sure that the spring wire is located to the right of the switch plate screw hub as shown.



Install the transmitter


## V200 Feedback options

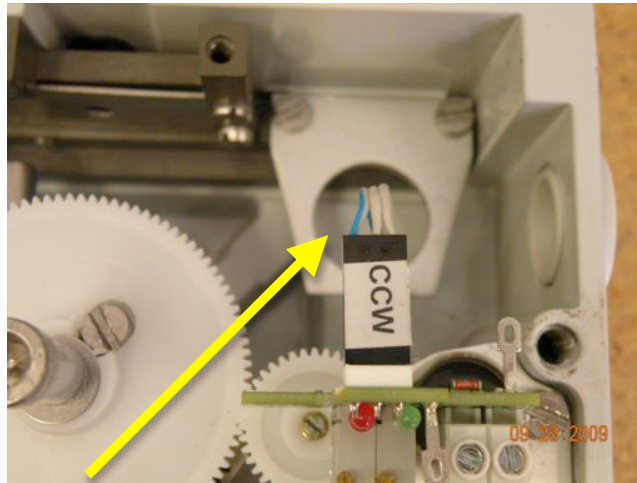


Connect the pot connector to the transmitter.

NOTE:

Blue wire to the Left is for counter  
clockwise operation  
Blue wire to the Right is for clockwise  
operation.

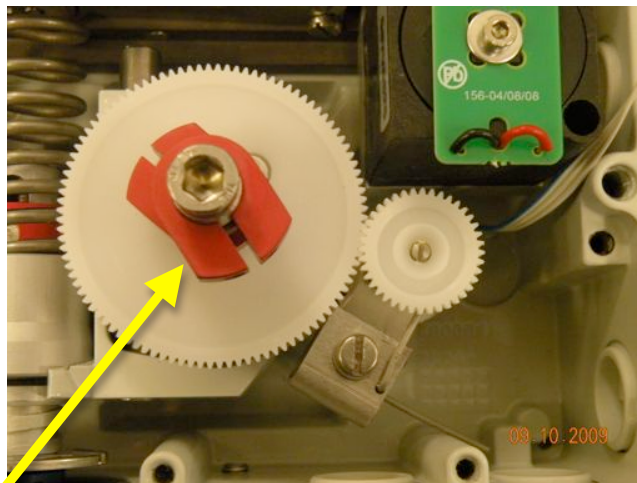


For switch mounting remove the spacer and  
washer and add the switch cams.

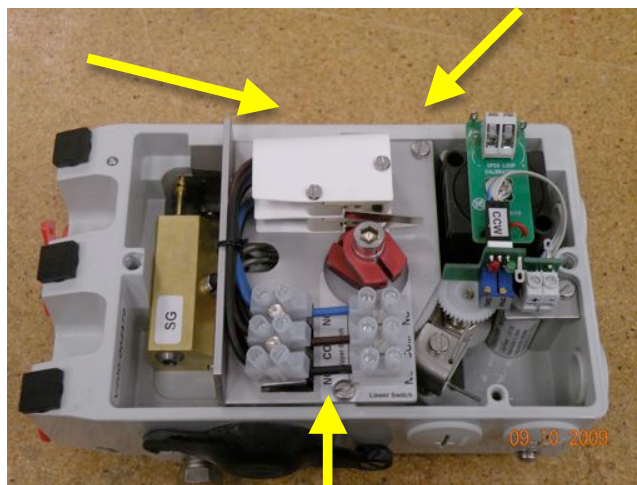

Secure the switch plate to the positioner  
w/ the three screws

## V200 Feedback options

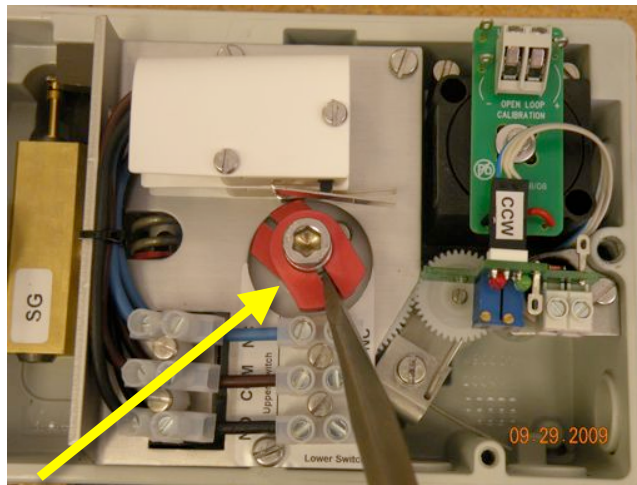

Set the switch cams with a screw driver to desired setting. Cams are friction fit for easy adjustment.